09:38:08 Fri Feb 19, 2010

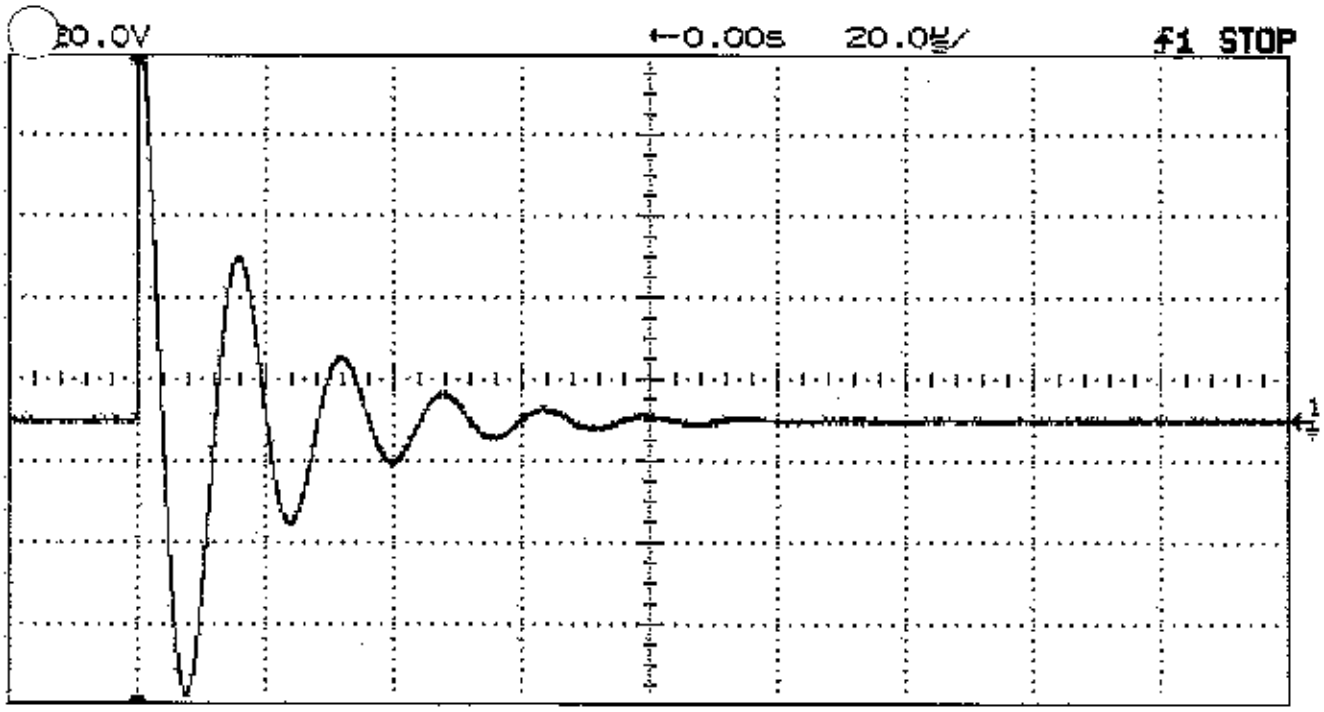

	State	Volts/Div	Position	Cplg	BW Lim	Inv	Probe
Chan 1	On	20.00 V	-10.00 V	DC	Off	Off	10:1
Chan 2	Off	100.0mV	0.000 V	DC	Off	Off	1:1

	Mode	Main Time/Div	Main Delay	Time Ref	Delayed Time/Div	Delayed Delay
Horizontal	Normal	20.00us/	0.000 s	Left	--------	-----

Trigger	Mode	Source	Level	Holdoff	Slope	Couplg	Reject	NoiseRej
	Normal	Ch 1	6.250 V	1.000us	Pos	DC	Off	Off

Display Mode: Normal

Traveler	318898
Step #	6.3
Magnet Serial Number	SMA017 UPPER SEXTUPOLE
Technician	D. GAU
Page Count	1 of 6

09:50:15 Fri Feb 19, 2010

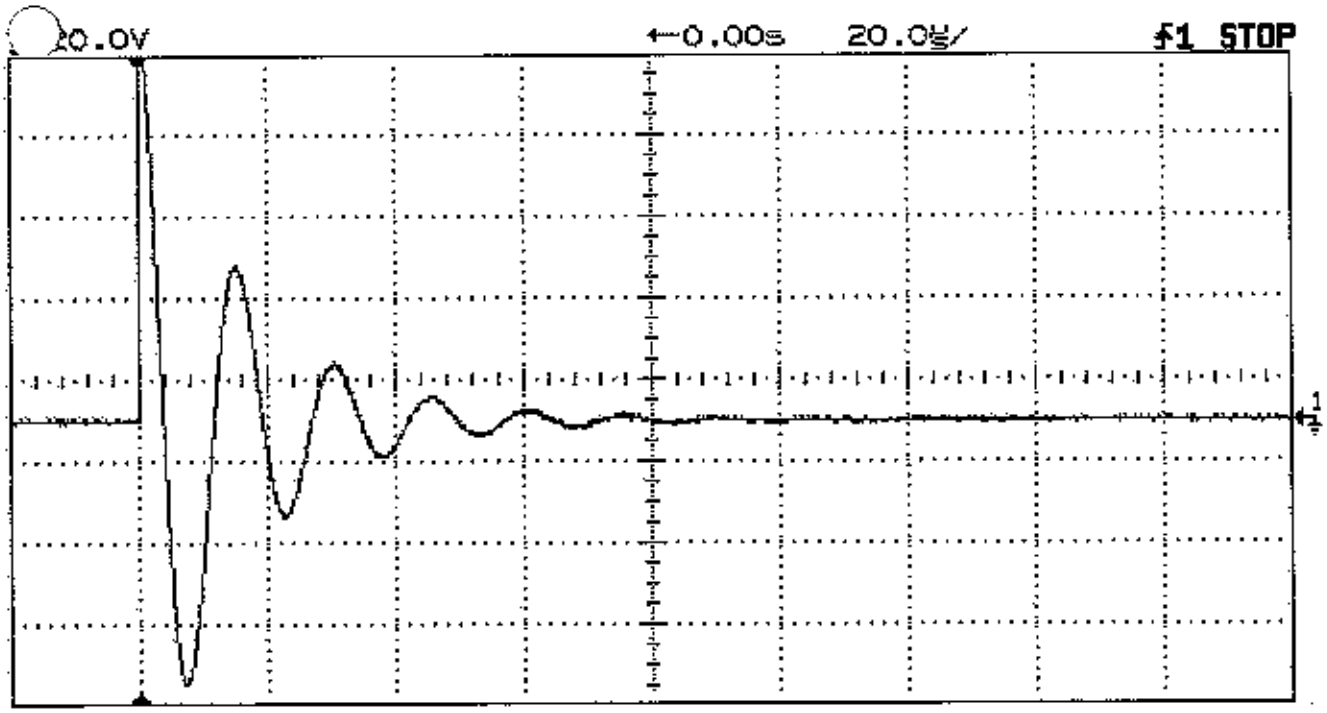

	State	Volts/Div	Position	Cplg	BW Lim	Inv	Probe
Chan 1	On	20.00 V	-10.00 V	DC	Off	Off	10:1
Chan 2	Off	100.0mV	0.000 V	DC	Off	Off	1:1

	Mode	Main Time/Div	Main Delay	Time Ref	Delayed Time/Div	Delayed Delay
Horizontal	Normal	20.00us/	0.000 s	Left	--------	-----

Trigger	Mode	Source	Level	Holdoff	Slope	Couplg	Reject	NoiseRej
	Normal	Ch 1	6.250 V	1.000us	Pos	DC	Off	Off

Display Mode: Normal

Traveler	318898
Step #	6.3
Magnet Serial Number	SMA017 LOWER SEXTUPOLE
Technician	D. GAW
Page Count	2 of 6

09:54:41 Fri Feb 19, 2010

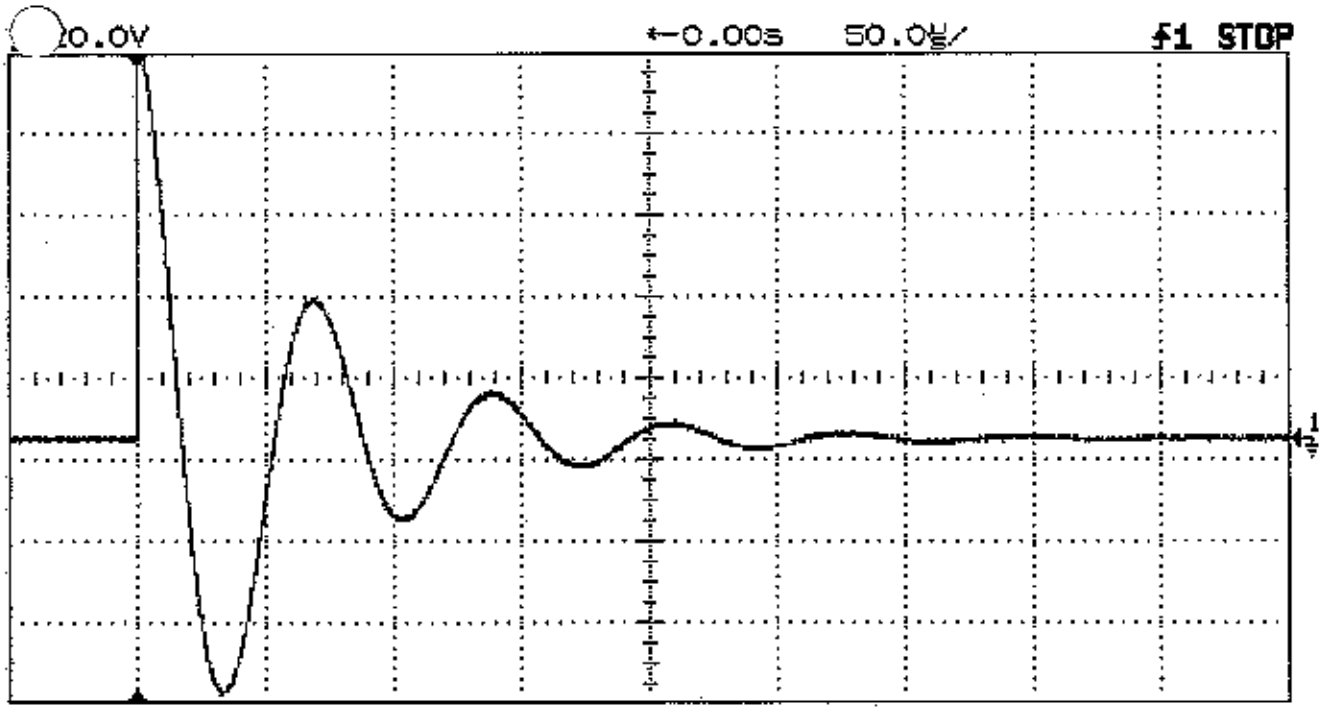

	State	Volts/Div	Position	Cplg	BW Lim	Inv	Probe
Chan 1	On	20.00 V	-15.00 V	DC	Off	Off	10:1
Chan 2	Off	100.0mV	0.000 V	DC	Off	Off	1:1

	Mode	Main Time/Div	Main Delay	Time Ref	Delayed Time/Div	Delayed Delay
Horizontal	Normal	50.00us/	0.000 s	Left	---------	-----

Trigger	Mode	Source	Level	Holdoff	Slope	Couplg	Reject	NoiseRej
	Normal	Ch 1	6.250 V	1.000us	Pos	DC	Off	Off

Display Mode: Normal

Traveler	318868
Step #	6.3
Magnet Serial Number	SMA017 TOTAL OCTUPOLE CIRCUIT
Technician	D. GAW
Page Count	3 of 6

10:07:21 Fri Feb 19, 2010

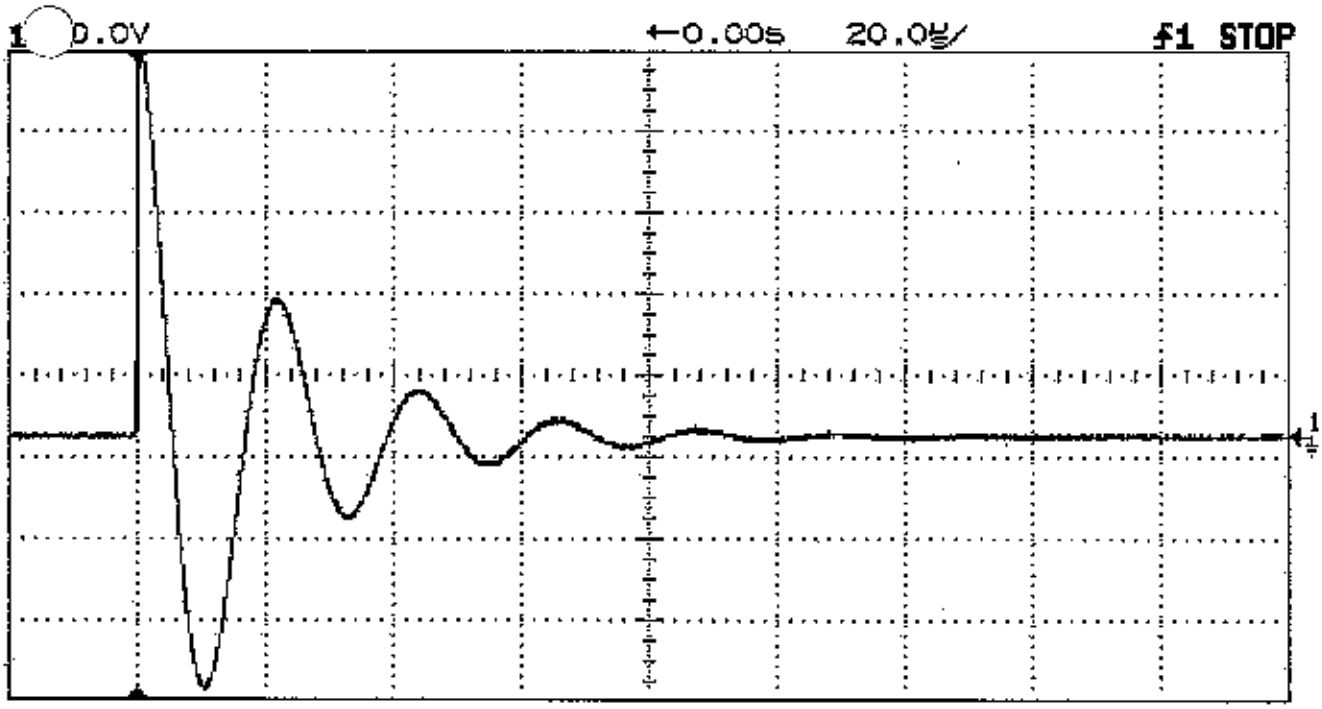

	State	Volts/Div	Position	Cplg	BW Lim	Inv	Probe
Chan 1	On	20.00 V	-15.00 V	DC	Off	Off	10:1
Chan 2	Off	100.0mV	0.000 V	DC	Off	Off	1:1

	Mode	Main Time/Div	Main Delay	Time Ref	Delayed Time/Div	Delayed Delay
Horizontal	Normal	20.00us/	0.000 s	Left	--------	-----

Trigger	Mode	Source	Level	Holdoff	Slope	Couplg	Reject	NoiseRej
	Normal	Ch 1	6.250 V	1.000us	Pos	DC	Off	Off

Display Mode: Normal

Traveler	318898
Step #	6.3
Magnet Serial Number	SMA017 TOTAL SEXTUPOLE CIRCUIT
Technician	D. GAL
Page Count	4 of 6

10:20:16 Fri Feb 19, 2010

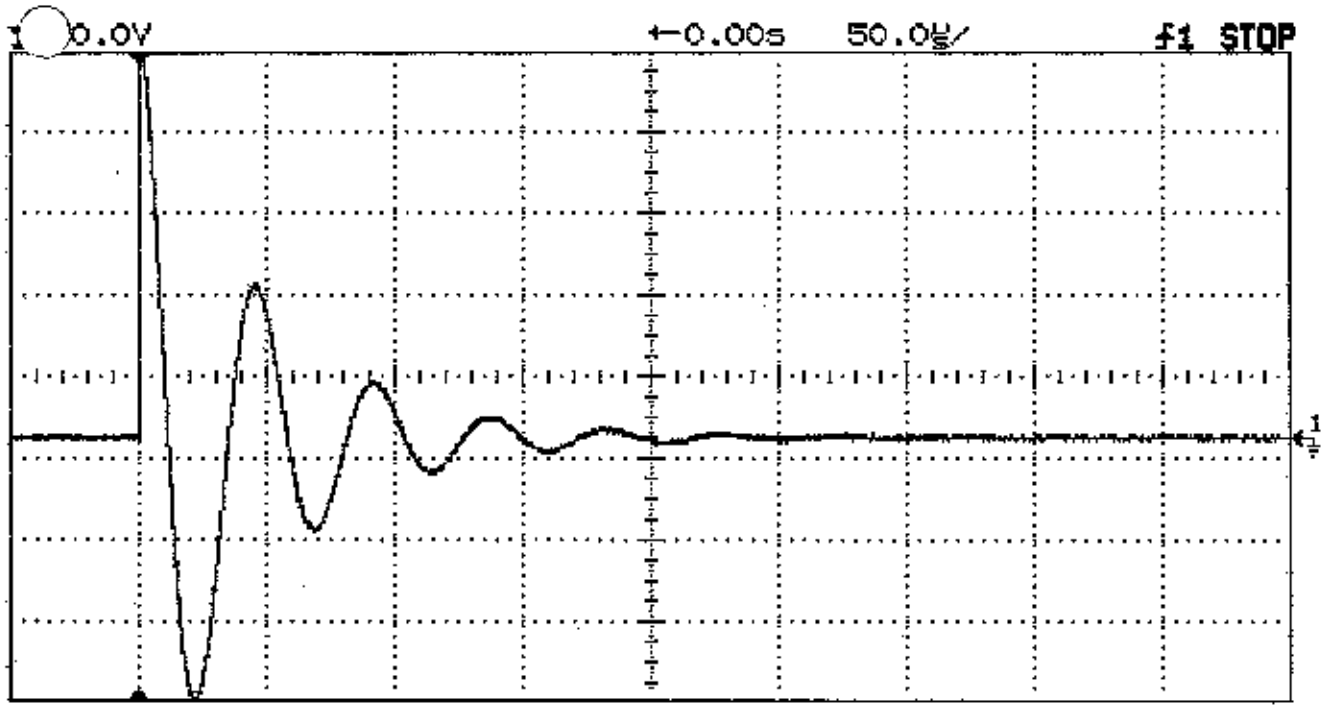

	State	Volts/Div	Position	Cplg	BW Lim	Inv	Probe
Chan 1	On	20.00 V	-15.00 V	DC	Off	Off	10:1
Chan 2	Off	100.0mV	0.000 V	DC	Off	Off	1:1

	Mode	Main Time/Div	Main Delay	Time Ref	Delayed Time/Div	Delayed Delay
Horizontal	Normal	50.00us/	0.000 s	Left	--------	-----

Trigger	Mode	Source	Level	Holdoff	Slope	Couplg	Reject	NoiseRej
	Normal	Ch 1	6.250 V	1.000us	Pos	DC	Off	Off

Display Mode: Normal

Traveler	318858
Step #	6.3
Magnet Serial Number	SMA017 UPPER OCTUPOLE
Technician	D. GAW
Page Count	5 of 6

10:31:03 Fri Feb 19, 2010

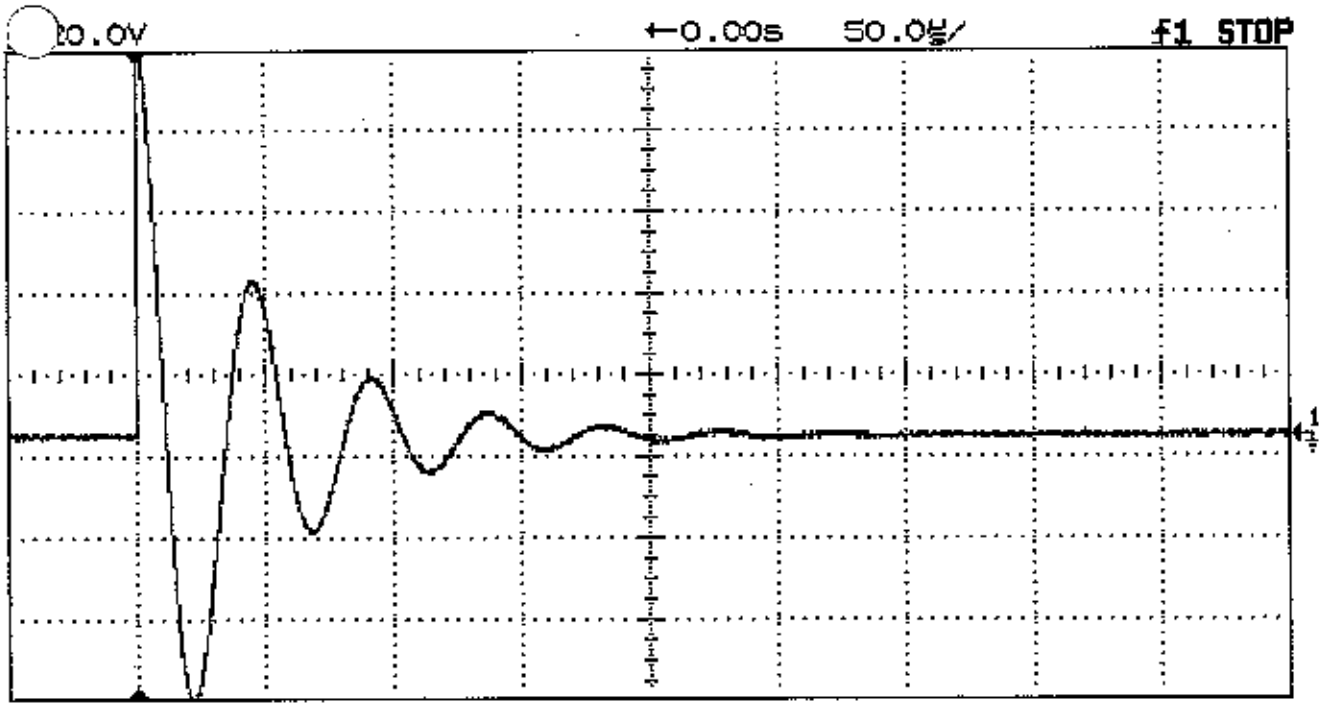

	State	Volts/Div	Position	Cplg	BW Lim	Inv	Probe
Chan 1	On	20.00 V	-15.00 V	DC	Off	Off	10:1
Chan 2	Off	100.0mV	0.000 V	DC	Off	Off	1:1

	Mode	Main Time/Div	Main Delay	Time Ref	Delayed Time/Div	Delayed Delay
Horizontal	Normal	50.00us/	0.000 s	Left	--------	-----

Trigger	Mode	Source	Level	Holdoff	Slope	Couplg	Reject	NoiseRej
	Normal	Ch 1	6.250 V	1.000us	Pos	DC	Off	Off

Display Mode: Normal

Traveler	318858
Step #	6.3
Magnet Serial Number	LOWER OCTUPOLE
Technician	D. Gam
Page Count	6 of 6